




SOLAR LIGHTING TOWER

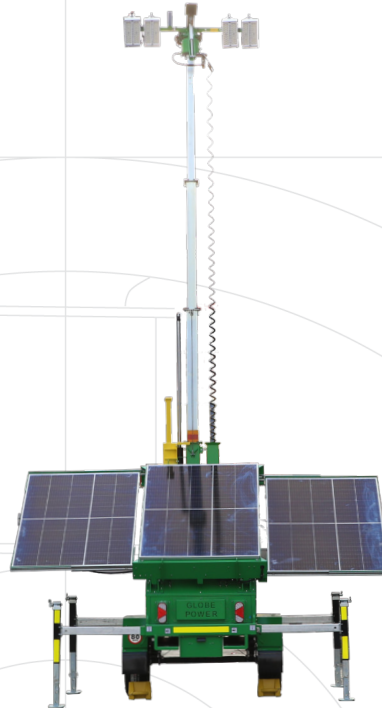

ECO GP56K

GENERAL

Model	Eco - GP56k
Lumen Output	56,000
Mast Height	24.6 Feet
Mast Type	Hydraulic/Cable
Lights	4 x 100w LED Modules
Coverage	360 Feet x 328 Feet at 5 lux
Light Bar Rotation	355° Electric
Light Bar Tilt	70° Electric
Trailer Type	Single Axle
Tyre and Rim Size	215/70R15
Stabiliser Supports	4 x Manual
Mudguard / Wheel Chock	Included
Features	Folding Drawbar, 7 day Timer/ Day Night modes, Fire Extinguisher, Emergency Stop, Battery Isolator, Adjustable Solar Tilt, Security wheel nuts, AC Charger

OPERATIONAL DATA


Wind Rating	60mph
Working Temperature	32°F to 122°F

BATTERY

Battery	10.8kWh Deep Cycle Gel
Runtime	30 Hours
Solar	1.23kWp
Solar Tilt	30° to 45°
Efficiency (solar)	1 hour of sun/3 hours of light

UNIT

Dimensions (Towing)	123.6" x 59.0" x 114.2" (LxWxH)
Dimensions (Deployed)	86.6" x 136.0" x 301.2" (LxWxH)
Dimensions (Stowed)	86.6" x 59.0" x 114.2" (LxWxH)
Weight	2866 lbs

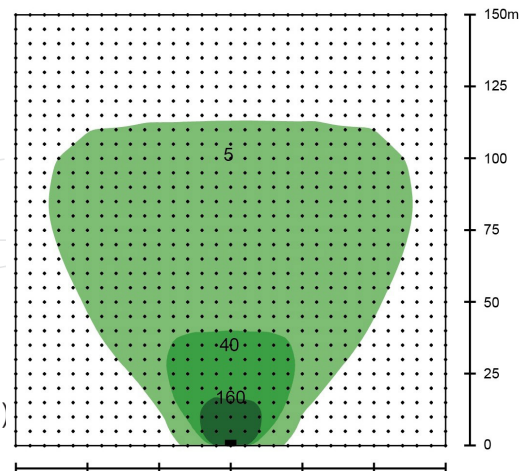

5Lx@60°
10900m²

40Lx@50°
1400m²

160Lx@35°
300m²