





**SOLAR HYBRID
LIGHTING TOWER**

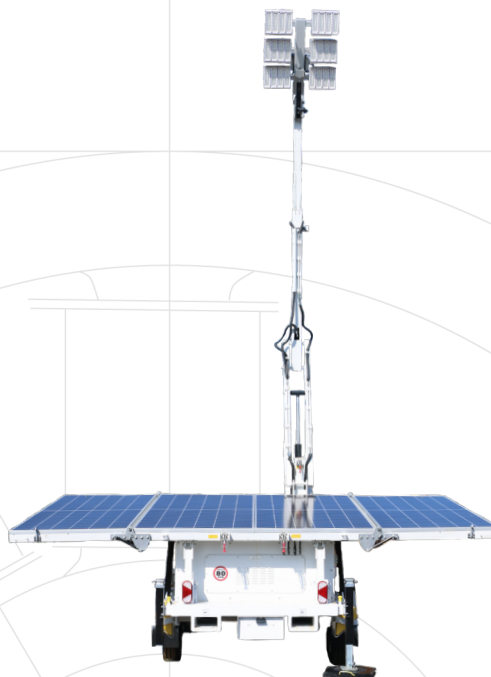

**GP125K
HYBRID**

GENERAL

Model	Mine Spec - GP125k Hybrid
Lumen Output	125,000
Mast Height	25 Feet
Mast Type	Hydraulic
Lights	6 x 200w LED Modules
Coverage	577 Feet x 528 Feet @ 5 lux
Light Bar Rotation	355° Hydraulic
Light Bar Tilt	70° Hydraulic
Trailer Type	Single Axle
Tyre and Rim Size	15'
Stabiliser Supports	5 x Manual
Mudguard / Wheel Chock	Included
Security	Wheel lock / hitch lock
Features	GPS, remote monitoring and control Dimmable lights, jack pads, fork pockets, lifting points

OPERATIONAL DATA

Wind Rating	60mph
Working Temperature	32°F to 122°F (-13°F with optional kit)

BATTERY

Battery	15.4kWh Lithium Ion (LFP)
Runtime	21 Hours
Solar	1.8kWp
Solar Tilt	10 to 55° Hydraulic
Efficiency (Diesel)	1 hour of generator equals 3 hours of light
Efficiency (Solar)	1 hour of sun equals 2 hours of light

UNIT

Dimensions (Stowed)	116.5 x 92.5 x 100.4 (LxWxH)
Dimensions (Deployed)	116.5 x 166.9 x 301.9 (LxWxH)
Weight	5071 lbs

Light plot for GP125K at 6.5m

